


COIL: @ +25°C  
 RESISTANCE 700 Ω ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 13.5 VDC  
 MUST RELEASE 8.0 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:  
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's  
 SHOCK 100 g's 6 MS. DURATION  
 TEMPERATURE -67° °C TO +125° °C

NOTES: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

CUSTOMER DATA SHEET

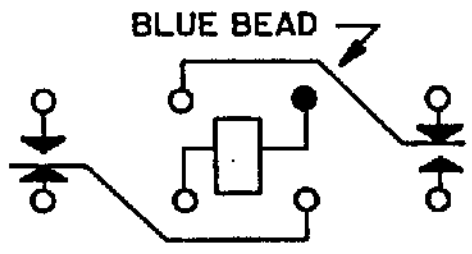

CONTACT RATING: 2 AMPS 28 VDC  
 RESISTIVE 100,000 OPERATIONS

DR. R.B. 10-30-90 CK. 10/30/90



CUST. QPL  
 CUST. NO. M39016/6-142L

TYPE "HFW" RELAY

HFW 1201K 103