

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0785650001**
Status: **Active**
Overview: DDR3 DIMM Sockets
Description: 1.00mm Pitch Aerodynamic DDR3 DIMM Socket, Low Profile, Vertical, Surface Mount, Black Housing and Latches, 0.76µm Gold (Au Plating, 3.18mm PCB Thickness, 240 Circuits, Lead-Free

Documents:

[3D Model](#) [Packaging Specification PK-78565-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General

Product Family Memory Module Sockets
 Series 78565
 Component Type Socket
 Electrical Model Yes
 JEDEC Outline SO-014
 Overview DDR3 DIMM Sockets
 Product Name DDR3 DIMM
 UPC 884982367661

Physical


Circuits (Loaded) 240
 Circuits (maximum) 240
 Durability (mating cycles max) 25
 Entry Angle Vertical
 Flammability 94V-0
 Housing Color Black
 Keying to Mating Part Yes
 Latch Color Black
 Material - Metal Copper Alloy
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin Nylon
 Net Weight 6.807/g
 PCB Locator Yes
 PCB Retention Yes
 PCB Thickness - Recommended 3.18mm
 Packaging Type Tray
 Pitch - Mating Interface 1.00mm
 Pitch - Termination Interface 1.00mm
 Plating min - Mating 0.762µm
 Plating min - Termination 2.540µm
 Temperature Range - Operating -55°C to +85°C
 Termination Interface: Style Surface Mount

Electrical

Current - Maximum per Contact 1.0A
 Voltage - Maximum 30V AC (RMS)/DC
 Voltage Key Center

Solder Process Data

Duration at Max. Process Temperature (seconds) 040
 Lead-freeProcess Capability REFLOW

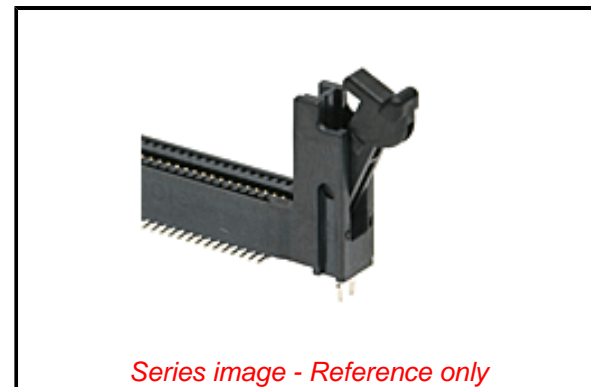

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
 -ED/01/2017 (12
 January 2017)

Halogen-Free

Status

Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
 Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS Green Image
 ELV Not Relevant
 RoHS Phthalates Not Contained

Search Parts in this Series

78565 Series

Mates With

JEDEC Standard 1.27mm Modules

Max. Cycles at Max. Process Temperature	002
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Electrical Model Document	EE-78565-001
Packaging Specification	PK-78565-001
S-Parameter Model	SP-78565-001
Sales Drawing	SD-78565-001

This document was generated on 03/06/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION