


| LOC | | DIST | | REV | | REVISIONS | | DATE | APPD |
|-----|----|------|---|------|-----|----------------------|--|--------|-------|
| AA | 27 | P | F | ZONE | LTR | DESCRIPTION | | | |
| | | | | M | | REV; EC 0210-0840-94 | | 3-2-95 | LM NJ |

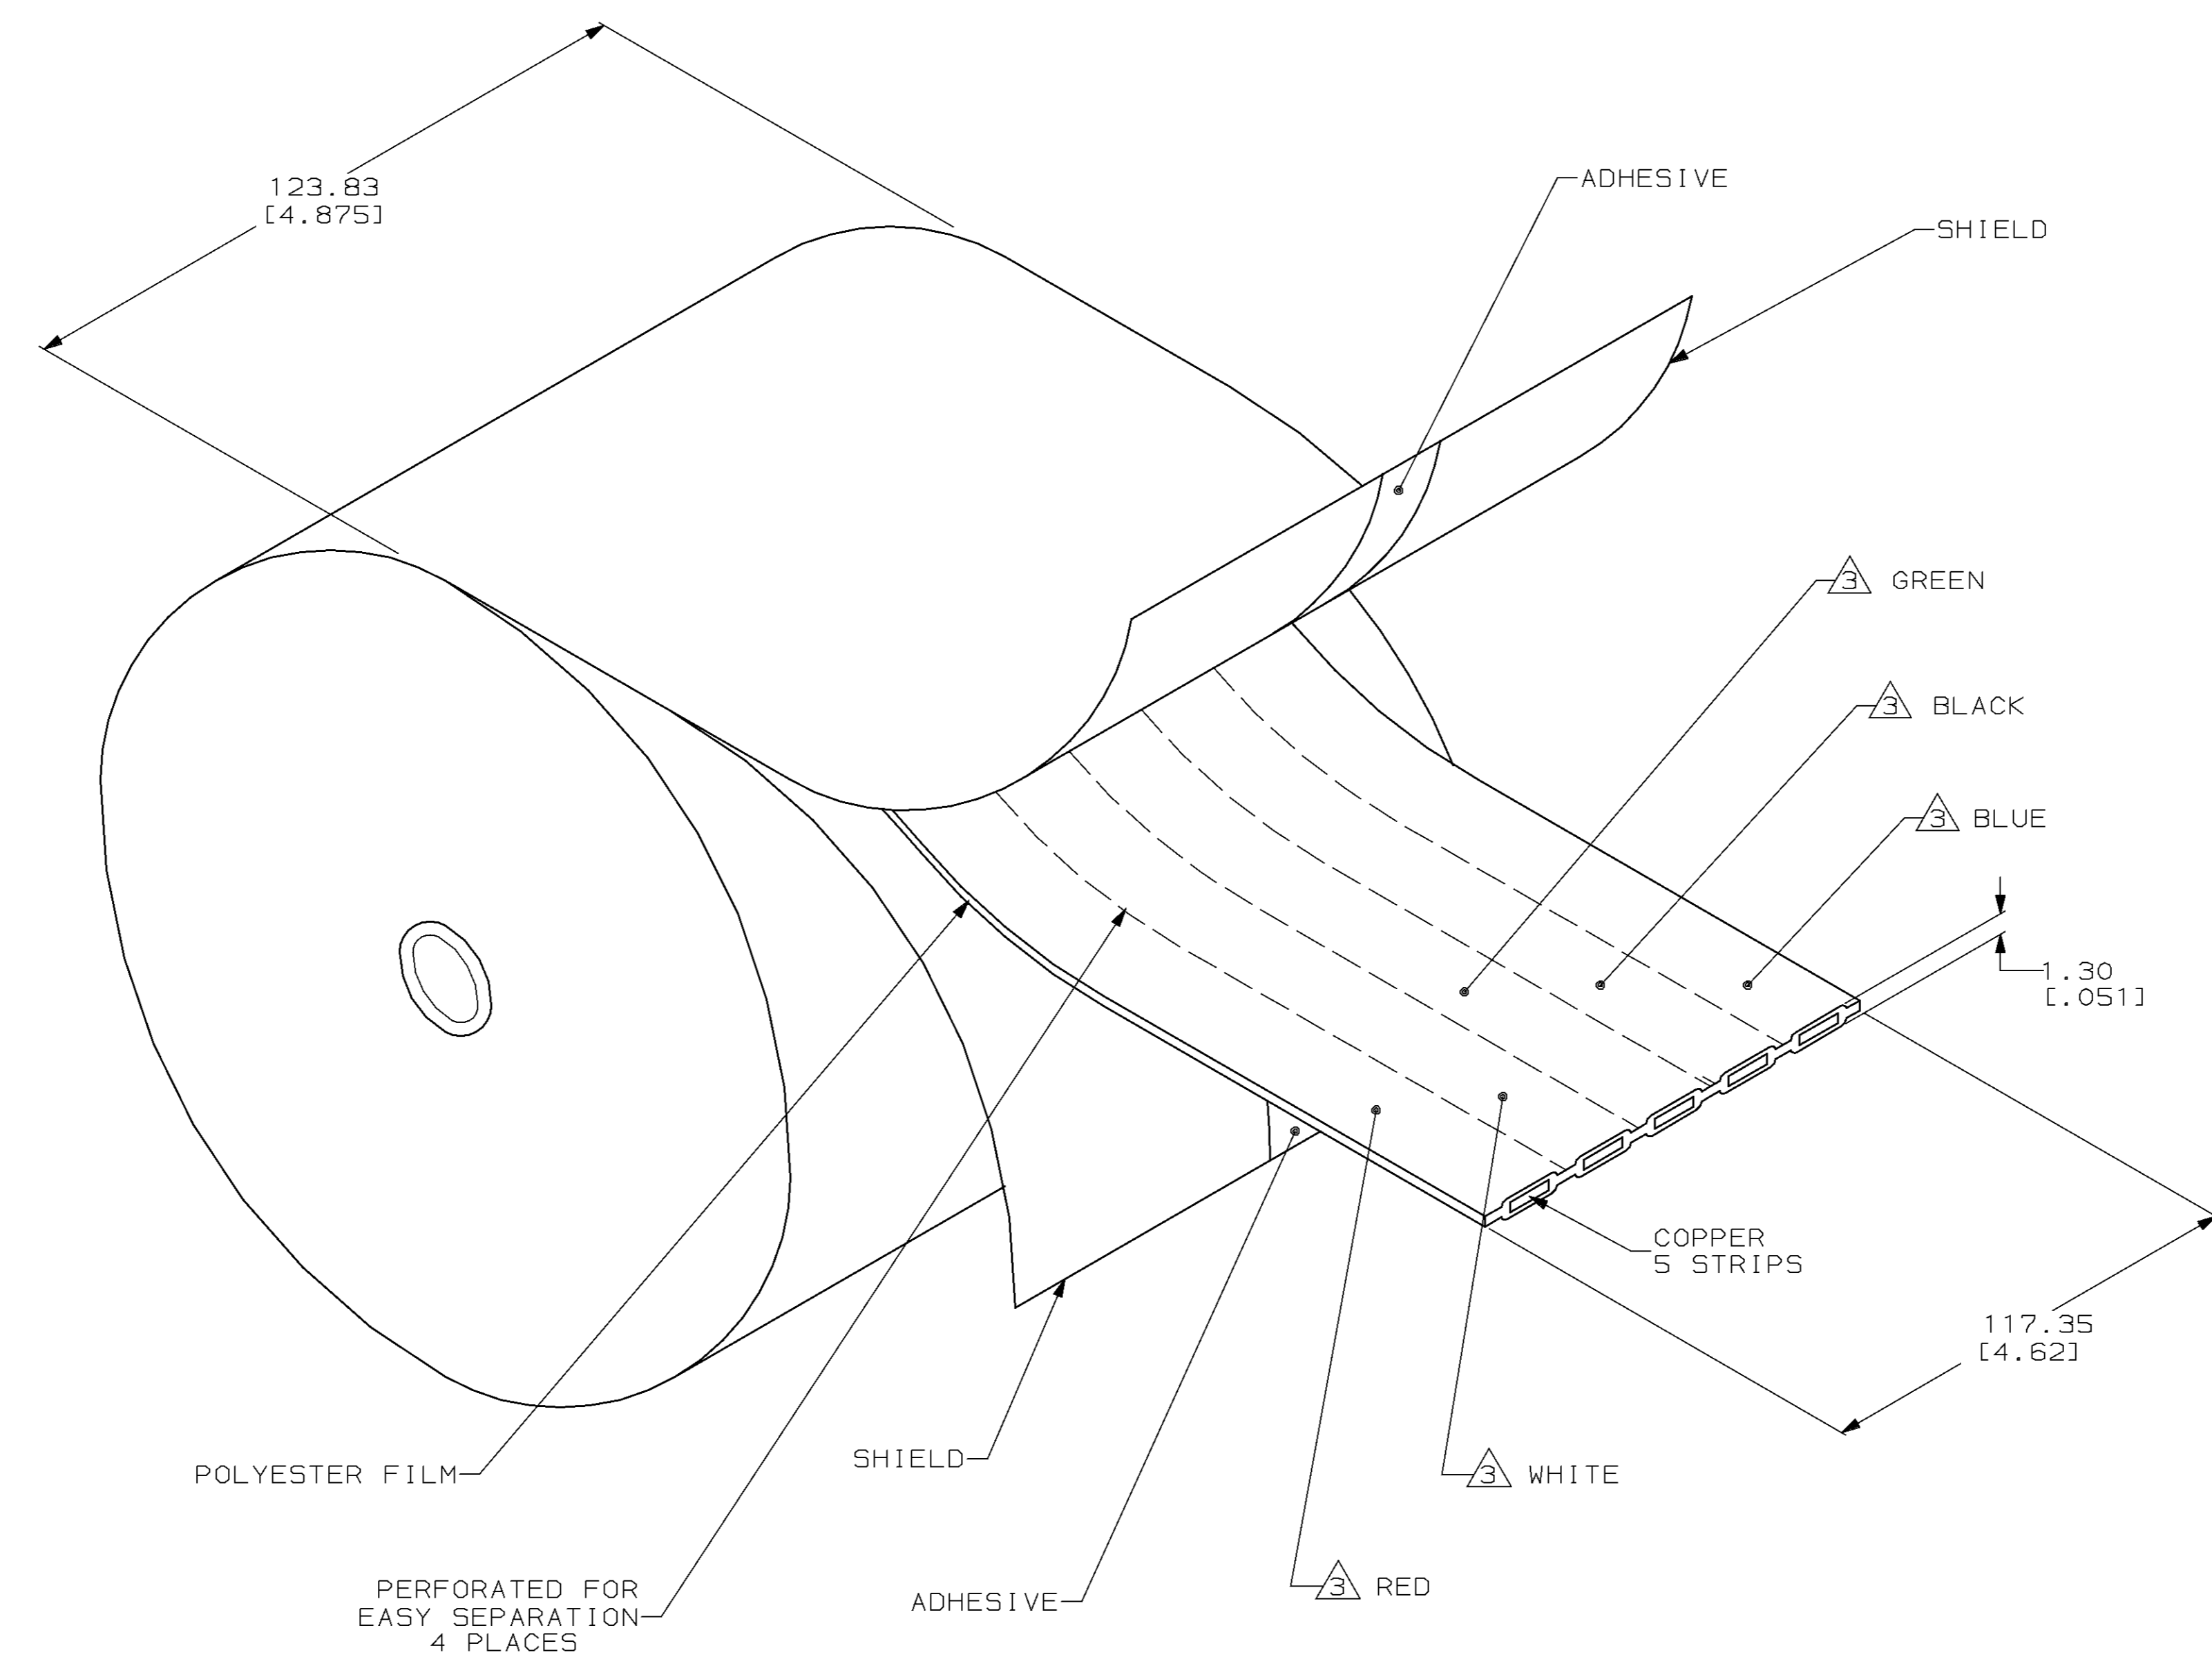

- 1 DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2 MATERIAL: POLYESTER FILM 0.025 [0.010] THICK. 2 LAYERS EACH SIDE. COPPER WIRE- 0.23 [0.009] THICK x 15.24 [0.600] WIDE. SHIELD- PVC, 0.025 [0.010] THICK.
- 3 CABLE MARKED WITH "AMP INC PN 553239 TYPE FCC UL CSA 12 AWG, CU 300V, 20 AMP 60°C" IN COLOR SPECIFIED FOR CONTINUOUS LENGTH OF ROLL AS SHOWN.
- 4 CAUTION: THE UNDERCARPET CABLE MAY NOT BE USED OUTDOORS OR IN WET LOCATIONS; WHERE THE CABLE WOULD BE SUBJECT TO CORROSIVE VAPORS; IN ANY HAZARDOUS (CLASSIFIED) LOCATION; OR IN RESIDENTIAL, SCHOOL, AND HOSPITAL BUILDINGS.

| | | |
|----------------------------|-------|------------|
| 30.7 | [101] | 3-553239-4 |
| 15.5 | [51] | 3-553239-3 |
| 76.5 | [251] | 3-553239-1 |
| LENGTH PER ROLL - M (FEET) | | PART NO |

| | | | | | | | |
|---|---|--------------------------|-----------|--|-------|------------|----------|
| DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: | | DR 2-18-94 B. SIMPSON | | AMP AMP Incorporated Harrisburg, PA 17105-3608 | | | |
| 2 PLC DEC ± | - | CHK - | C. WHITT | | | | |
| 3 PLC DEC ± | - | APPD - | B. MCNEIL | | | | |
| ANGLES ± | - | APPD - | D. MARGO | | | | |
| MATERIAL | 1 | PRODUCT SPEC | 108-6038 | CABLE, FLAT, 5 CONDUCTOR, 12 AWG, POWER, UNDERCARPET | | | |
| FINISH | - | APPLICATION SPEC | 114-6008 | | | | |
| | | SIZE | D | CAGE CODE | 00779 | DRAWING NO | C=553239 |
| | | WEIGHT | - | SCALE | - | SHEET | 1 OF 1 |

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.