

PANEL HARDWARE


Designers' Choice



MATERIAL: Stainless Steel per ASTM-A581/A582


THUMB SCREWS

4-40

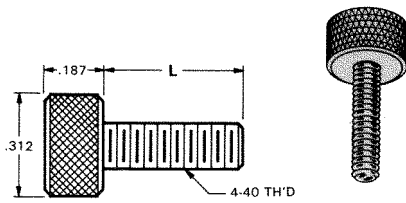


CAT. NO.	LENGTH
2400	.312
2401	.375
2402	.437
2403	.500

6-32

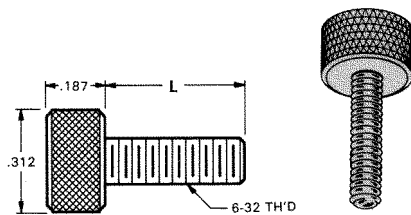

CAT. NO.	LENGTH
2404	.312
2405	.375
2406	.437
2407	.500


8-32

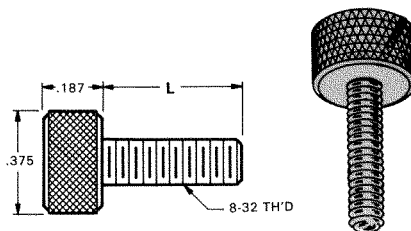

CAT. NO.	LENGTH
2408	.375
2409	.437
2410	.500
2411	.562
2412	.625


CAPTIVE SCREWS

4-40

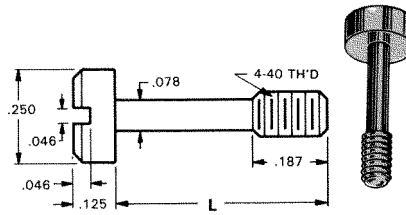


CAT. NO.	LENGTH
2413	.469
2414	.531

6-32

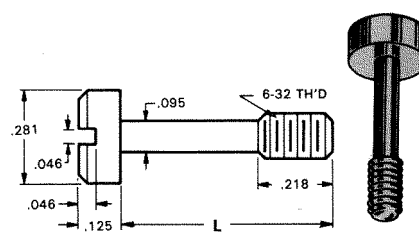

CAT. NO.	LENGTH
2415	.531
2416	.593
2417	.656


8-32

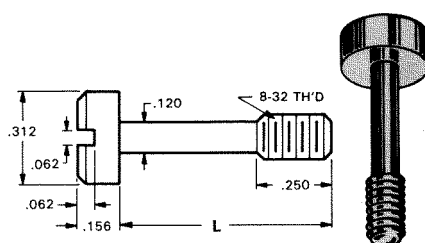

CAT. NO.	LENGTH
2418	.656
2419	.718
2420	.781

SHOULDER SCREWS

4-40

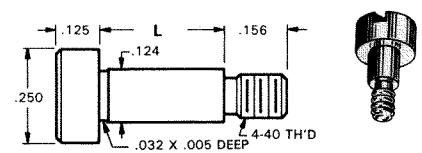


SLOTTED

SOCKET

CAT. NO.	LENGTH	CAT. NO.
2421	.125	2441
2422	.250	2442
2423	.375	2443
2424	.500	2444

6-32

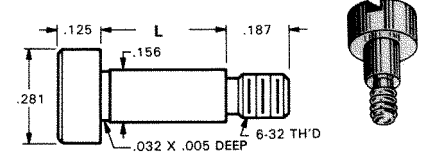


SLOTTED

SOCKET

CAT. NO.	LENGTH	CAT. NO.
2425	.125	2445
2426	.250	2446
2427	.375	2447
2428	.500	2448
2429	.625	2449
2430	.750	2450

8-32

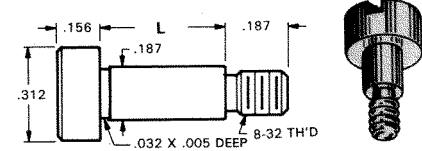

SLOTTED

SOCKET

CAT. NO.	LENGTH	CAT. NO.
2431	.125	2451
2432	.250	2452
2433	.375	2453
2434	.500	2454
2435	.625	2455
2436	.750	2456
2437	1.000	2457






Designers' Choice

PANEL HARDWARE

STAINLESS STEEL CAPTIVE PANEL SCREWS

MATERIAL: Stainless Steel per ASTM-A581/A-582

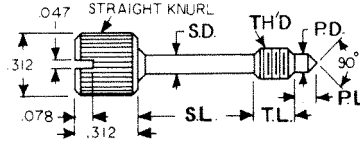
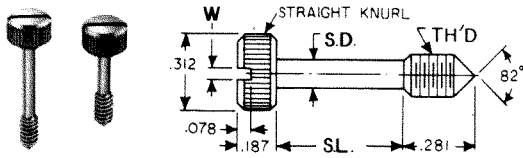


CAT. NO.	TH'D	S.D. +.005	S.L. +.010	W +.005 -.000
8700	4-40	.078	.375	.036
8701	4-40	.078	.500	.036
8702	4-40	.078	.625	.036
8703	6-32	.095	.375	.045
8704	6-32	.095	.500	.045
8705	6-32	.095	.625	.045



CAT. NO.	TH'D	T.L. +.000 -.015	S.D. +.005	S.L. ±.010	P.D. +.000 -.010	P.L. ±.015
8706	4-40	.125	.078	.171	.078	.078
8707	4-40	.125	.078	.296	.078	.078
8708	4-40	.125	.078	.421	.078	.078
8709	6-32	.218	.095	.187	.095	.093
8710	6-32	.218	.095	.312	.095	.093
8711	6-32	.218	.095	.437	.095	.093

SHAFT LOCKS (1/8" & 1/4")


MATERIAL: Brass, ASTM-B16, Nickel Plate per QQ-N-290



CAT. NO. 1700



CAT. NO. 1701



CAT. NO. 1702

PANEL BEARINGS

STANDARD AND MINIATURE

MATERIAL: Brass, Nickel Plated (QQ-N-290). Supplied unassembled.



CAT. NO.	A	B	C	D	E
1705	.253	.437	.500	.437	3/8-32 Standard
1706	.128	.343	.437	.375	1/4-32 Miniature


THUMB SCREWS

For quick removal of panel from chassis.

Other variations available

MATERIAL: Brass, Nickel Plated (QQ-N-290)


CAT. NO.	THREAD
1708	6-32
1709	8-32
1710	10-32



PRECISION PANEL NUTS

For Volume Controls, Switches, Capacitors, Tip Jacks, etc.

MATERIAL: Brass, Nickel Plated (QQ-N-290).



CAT. NO.	FOR	THREAD	DIAMETER	THICKNESS
1448	Mounting	1/4-32	3/8 Hex	3/32"
1449	Mini. Control	1/4-32	5/16 Hex	5/64"
1456	Vol. Control	3/8-32	1/2 Hex	3/32"
1458	Switch	15/32-32	9/16 Hex	5/64"
1459	Switch Ring	15/32-32	5/8 Knurled	1/16"
1472	Filter	5/16-32	3/8 Hex	3/32"


1/4" - 1/4" SHAFT COUPLING

MATERIAL: Brass, Nickel Plated (QQ-N-290).

Two set screws hold shaft securely.

Supplied unassembled.



CAT. NO. 1453

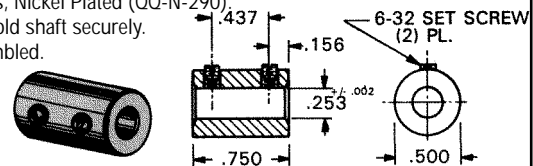

STAINLESS STEEL CAPTIVE SCREW

For quick removal of panel from chassis. Other variations available

MATERIAL: Stainless Steel per ASTM-A581/A582

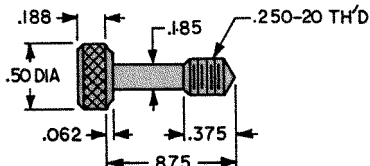

CAT. NO. 1704

VOLUME CONTROL EXTENDERS

For 1/4" volume control shafts having 3/8-32 threaded bushings.

MATERIAL: Brass, Nickel Plated (QQ-N-290).

CAT. NO.	A	B
1464	.625	.250
1465	.625	.375
1466	.687	.500
1467	.750	.250

