

10 9 8 7 6 5 4 3 2 1

F



E

D




C

B

A

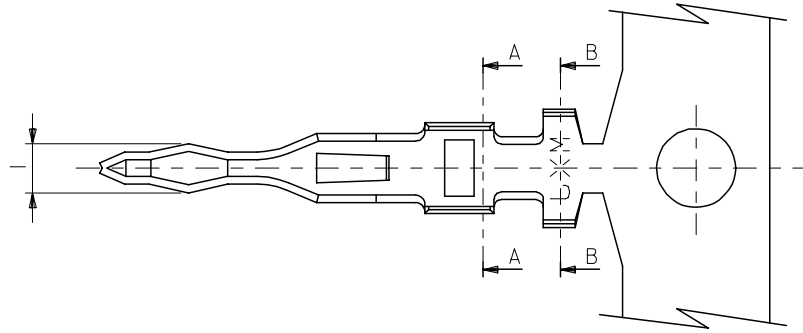

断面A-A  
SECT. A-A

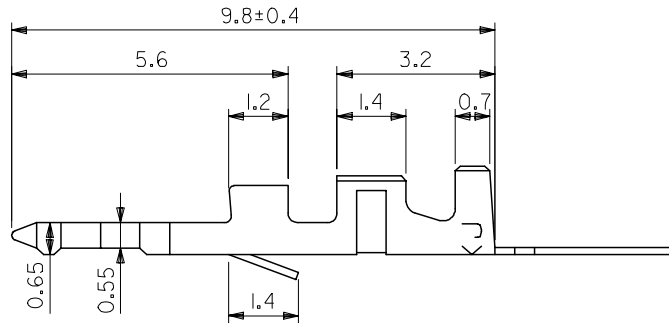

断面B-B  
SECT. B-B

注)  
NOTE.

1. 適合ハウジング : 5395-N  
HOUSING:5395-N

08-70-1044	5394TL	バラ状 LOOSE
08-70-1043	5394T	連鎖状 CHAIN
EDP.NO.	ENG.NO.	形状 FORM

REVISED EC NO: J2005-0061 DRAWN: TANAKA 2005/02/03 CHKD: NUKITA 2005/02/04 APPR: NUKITA 2005/02/10	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
	10 UNDER	±0.2	DRAWN BY KKOHAMA		DATE 2000/03/28		BOARD IN CONN. MINI. CRIMP PIN		
	10 OVER 30 UNDER	±0.25	CHECKED BY TYAMAGUC		DATE 2000/03/30				
	30 OVER	±0.3	APPROVED BY MFUKUSHI		DATE 2000/03/30		MOLEX INCORPORATED		
ANGULAR ±3 °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-5394*		SHEET NO. 1 OF 1	

MATERIAL  
 黄銅 (錫メッキ) t : 0.15  
 PRE-TINNED BRASS t : 0.15