


CUSTOMER DATA SHEET

COIL: @ +25°C 26.5VDC NOMINAL	
WINDING # 1	WINDING # 2
675 OHMS	OHMS
13.5V MUST OPERATE	MUST OPERATE
26.5 VDC NOMINAL	

TOLERANCE UNLESS OTHERWISE SPECIFIED
 DECIMALS ±.005 FRACTIONAL ± 1/64

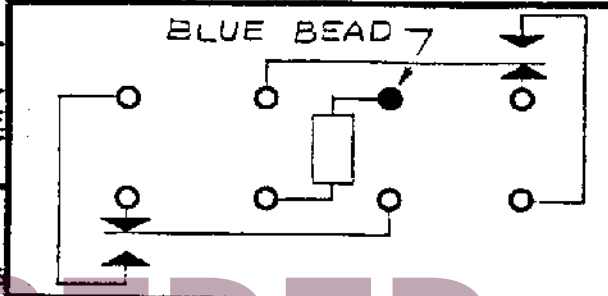

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

CONTACT RATING: LOW LEVEL TO
 2 AMPS @ 28 VDC RESISTIVE
 100,000 OPERATIONS.

NOTES: OPERATE & RELEASE 5MS MAX
 CONTACT BOUNCE 1MS MAX

DR. 4-16-85 CK. OSW
 Communications Instruments, Inc.

CUST. QPL
 CUST. NO. M5757/10-035

TYPE "FW" RELAY

FW 1109G06