

REV. 4 8/31/95

COIL:


RESISTANCE	1500 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	100	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: (LEVEL L ACCEPTANCE TESTING ONLY)

CUSTOMER DATA SHEET

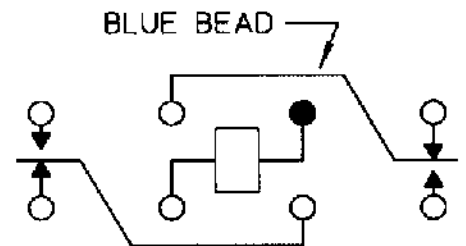

CONTACT RATING:	1 AMP 28 VDC RESISTIVE
	100,000 OPERATIONS

DR. R.B. 1/21/93 CK. 8/31/95



CUST. QPL  
CUST. NO. M39016/34-008

TYPE 'MFW' RELAY

MFW1201N03

SUPERSEDED  
NOT THE LATEST REVISION