


REV. 1 4/8/99

DCO 102124

COIL: @ 25°C	
RESISTANCE	7600 OHMS ± 10%
NOMINAL VOLTAGE	120.0 VDC
MUST OPERATE	65.0 VDC
MUST RELEASE	36.1 VDC MAX, 7.7 VDC MIN.

CUSTOMER DATA SHEET

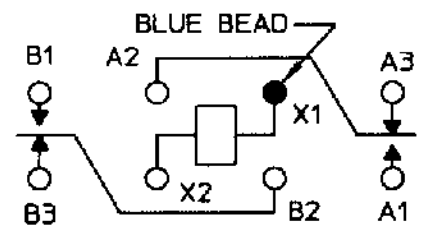

TERMINAL VIEW

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 15 MS MAX.  
CONTACT BOUNCE 5 MS MAX.

CONTACT RATING: 10 AMPS 28 VDC  
5 AMPS 115 VAC/400 HZ RESISTIVE  
100,000 OPERATIONS

DR. R.B. 12/11/98 CK. G/8/22 gms



CUST. QPL  
CUST. NO. M5757/23-030

TYPE '07' RELAY

B07D034BE2-0135