

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [39-00-0329](#)
Status: **Active**
Overview: Standard .062" Pin and Socket Power Connectors
Description: 1.57mm Diameter, Standard .062" Pin and Socket Crimp Terminal, Series 1560, Male, with Gold (Au) over Nickel Plated Brass Contact, 18-24 AWG, Reel

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-1625-010 \(PDF\)](#)

General

Product Family	Crimp Terminals
Series	1560
Application	Power
Crimp Quality Equipment	Yes
Overview	Standard .062" Pin and Socket Power Connectors
Product Name	Standard .062"
UPC	800753330214

Physical

Gender	Male
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Net Weight	123.700/mg
Packaging Type	Reel
Plating min - Mating	0.356µm
Plating min - Termination	0.356µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.50-3.10mm
Wire Size AWG	18, 20, 22, 24
Wire Size mm ²	N/A

Electrical


Current - Maximum per Contact	5A
Voltage - Maximum	250V

Material Info

Old Part Number	1560G
-----------------	-------

Reference - Drawing Numbers

Product Specification	PS-1625-010, RPS-1625-001
-----------------------	---------------------------

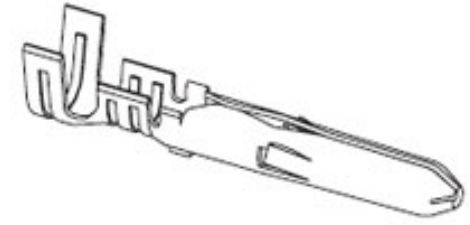

Series

image - Reference only

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No Low-Halogen Status Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

1560Series

Use With

1625 housing

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Hand Crimp Tool for Standard 1.57mm Pin and Socket Crimp Terminals, 18-24 AWG	0638191300
Mini-Mac™ Applicator	0638914000
Hand Insertion Tool	0011020001
Manual Extraction Tool	0011030002

Japan

Description	Product #
Applicator for M211A	0011260072
Bench Press, 18-28	
AWG Wire	
Hand Extraction Tool	0011267034

This document was generated on 09/02/2014

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION