PART NO.	ENG. NO.	
02-06-2201	1786-(901)	
02-06-2202	1786-(901)L	
02-06-6205	1786-(591)	**OBSOLETE**
02-06-6206	1786-(591)L	**OBSOLETE**
02-06-6201	1786-(550)	
02-06-6202	1786-(550)L	



CARRIER VIEW
ACTUAL SIZE





SECT. "B-B"
SCALE: 10X



SECT. "C-C"
SCALE: 10X

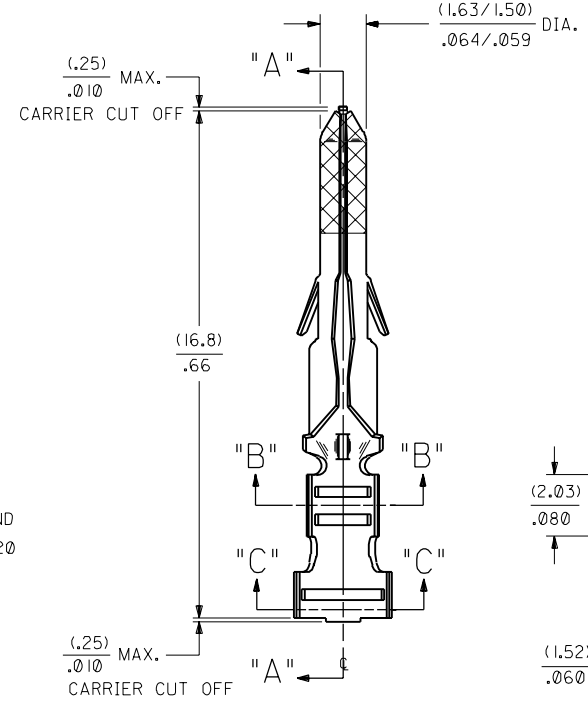

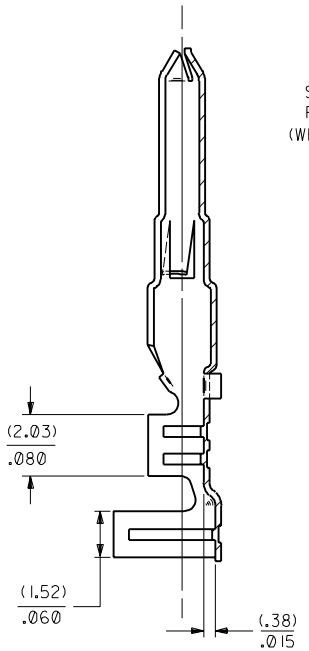

SECT. "A-A"

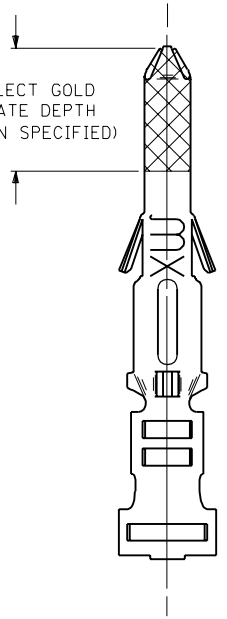

LEGEND

1786-(****)*

- P=PREPLATE, BLANK=POSTPLATE
- FINISH CODE
- FORM: BLANK=CHAIN, L=LOOSE

NOTES:

1. TERMINAL FOR USE WITH (1.57)/.062 DIA. SERIES HOUSINGS AND WILL ACCEPT 18 THRU 24 AWG WIRE WITH (1.52/3.05)/.060/.120 INSULATION DIA.
2. THIS PART CONFORMS TO PRODUCT SPEC. 02-06.

FINISH CODES:

901 HOT TIN DIP (.000051)/.000020 MIN.

591 SELECT GOLD PLATE (.00127)/.000050 MIN. IN CONTACT AREA, OVER (.00127)/.000050 MIN. NICKEL OVERALL WITH (.00025)/.000010 MAX. GOLD FLASH OVERALL.

550 SELECT GOLD PLATE (.00038)/.000015 MIN. IN CONTACT AREA, OVER (.00076)/.000030 MIN. NICKEL OVERALL WITH (.00025)/.000010 MAX. GOLD FLASH OVERALL.

MATERIAL NOTE:

PHOSPHOR BRONZE, ALLOY #C51000, (.20)/.008 THICK, SPRING TEMPER

MFG.	SH.	REV.	LTR.	REVISIONS
			AN	OBSOLETE P/N UCR2002-0270 COMERCI 01/9/26
			AM1	OBSOLETE -(558) & -(558)L ECR U6 0358 GEP 9/15/95 RW
			AM	REV. & REDRAWN PER ECR 10372 GEP 9-17-86 RW

DIMENSIONS SHOWN (METRIC) INCH
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°

	INCH	METRIC
3 PLACE	± .010	---
2 PLACE	± .014	± 0.25
1 PLACE	---	± 0.35

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

REVISE ONLY ON CAD SYSTEM

TITLE: CRIMP TERMINAL, MALE (1.57)/.062 DIA., PHOS. BRONZE FOR 18 THRU 24 GA. WIRE

MOLEX INCORPORATED
LISLE, ILL. 60532 U.S.A.

SHEET NO. 1 OF 1 | DATE 9/17/87

PART NO. SEE CHART | DRWG. NO. SD-1786-*

DRWG. BY	CHK'D. BY	FILE NAME	DIV.	SIZE
GEP	RW	SD1786X1.DGN	CP	C
APP'D. BY: RAS	SCALE: 8 : 1			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

1786